

STRAINER

CAST IRON | PN-16 (Y Type)

DESIGN & COMPLIANCES

EN 13789, BS 5152, BS 7350, EN 558-1(1), DIN 3352

END CONNECTION


BS EN 1092-2, BS 4504, DIN 2501

TESTING STANDARD

6755, EN 12266-1

APPLICATIONS

Water Supply, Oil, Gas, Steam, Raw Water, Waste Water

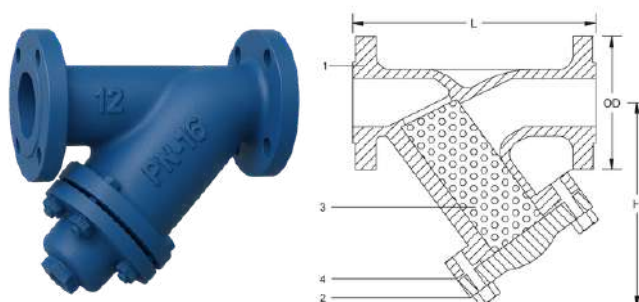

Sr. No	COMPONENTS	SPECIFICATIONS
1	Body	Cast Iron EN-GJL-250
2	Cover	Cast Iron EN-GJL-250
3	Perforated Mesh	SS 304 SS 316
4	Gasket	Non Asbestos
Painting		Epoxy Corrosion Resistant Polyurethane

Special Configurations (Subject to manufacturer's approval)

- Gasket Spiral Wound, Wire Woven
- Ball Valve on Top Plate

DIMENSIONS (MM)

Sizes	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700
Face to Face (L)	200	230	290	310	350	400	480	600	730	850	980	1100	1200	-	-	-
OD (D)	150	165	185	200	220	250	285	340	405	460	520	580	640	715	840	-
Height (H)	200	225	285	300	335	385	460	550	610	700	770	940	1060	1120	1280	-