

BUTTERFLY VALVE

PN-16 | CLASS 150 (Lever Operated)

DESIGN & COMPLIANCES

API 594, BS 5155, ISO 5752, DIN 3202, JIS B 2032, AWWA C504, MSS SP 67

END CONNECTION


EN 1092-2, BS 4504, DIN 2501

TESTING STANDARD

API 598, BS 6755, EN 12266-1

APPLICATIONS

Water Supply, Oil, Gas, Steam, Raw Water, Waste Water

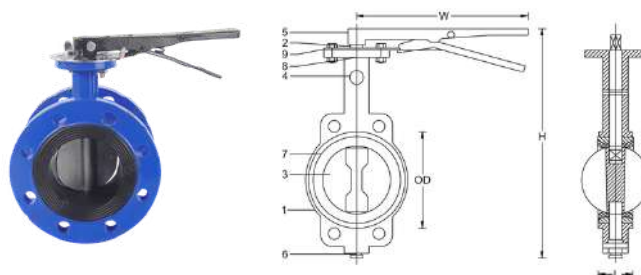

Sr. No	COMPONENTS	SPECIFICATIONS
1	Body	Cast Iron EN-GJL-250 Ductile Iron EN-GJS-500
2	Stem	SS 304 SS 316 Cr13
3	Disc	Ductile Iron CF8
4	O-Ring	EPDM PTFE Teflon
5	Lever	Ductile Iron EN-GJS-500
6	Bottom Stem	SS 304 SS 316 Cr13
7	Seal Rubber	EPDM
8	Spring Washer	Carbon Steel
9	End Plate	Carbon Steel
Painting		Epoxy Corrosion Resistant Polyurethane

Special Configurations (Subject to manufacturer's approval)

- Actuator to be installed against request
- PTFE coated disc

DIMENSIONS (MM)

Sizes	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700
Face to Face (L)	33	42	45	50	60	65	70	70	75	80	85	90	110	135	160	-
OD (D)	200	220	240	280	310	330	385	455	575	640	700	865	930	995	1110	-
Height (H)	130	130	145	150	170	185	210	270	325	360	430	480	550	585	650	-