

BALANCING VALVE

PN-16

DESIGN & COMPLIANCES

EN 13789, BS 5152, BS 7350, DIN 3352

END CONNECTION


BS EN 1092-2, BS 4504, DIN 2501

TESTING STANDARD

BS 6755, EN 12266-1

APPLICATIONS

Hot & Cold Water.

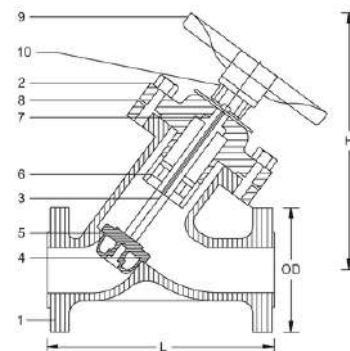

Sr. No	COMPONENTS	SPECIFICATIONS
1	Body	Ductile Iron EN-GJS-450
2	Bonnet	Ductile Iron EN-GJS-450
3	Stem	SS 304 Bronze
4	Disc	Ductile Iron EN-GJS-450
5	Disc Ring	PTFE Teflon
6	Bearing Bush	SS 304 Bronze
7	O-Ring	EPDM PTFE Teflon
8	Gasket	Non Asbestos
9	Handwheel	Ductile Iron EN-GJS-500
10	Indicator	PVC ABS
Painting		Epoxy Corrosion Resistant Polyurethane

Special Configurations (Subject to manufacturer's approval)

- Disc Bronze
- O-Rings Bronze

DIMENSIONS (MM)

Sizes	65	80	100	125	150	200	250	300	350	400	450	500	600
Face to Face (L)	290	310	350	400	480	600	730	850	980	1100	1200	1250	1450
Height (H)	290	360	390	410	430	510	660	820	945	1255	1340	1423	1600
Flange (OD) PN-16	185	200	220	250	285	340	405	460	520	580	640	715	770